


GULF-O-TAPE

Gulf-O-Tape is the flexible and self-adhesive reinforcement insulation foam tape, which is made from the same elastomeric material as Gulf-O-Flex closed cell insulation.

Ideal for wrapping hot or cold pipings and fittings. Energy saving and very easy to use. Excellent for preventing condensation problems. Designed specially for retarding heat loss in hot pipings and preventing heat gain or frost forming on cold, chilled water pipings or refrigeration lines.

Adheres firmly to all metals. No problem of de-lamination Gulf-O-Tape is specially coated with selected acrylic pressure coated sensitive adhesive providing long service life.

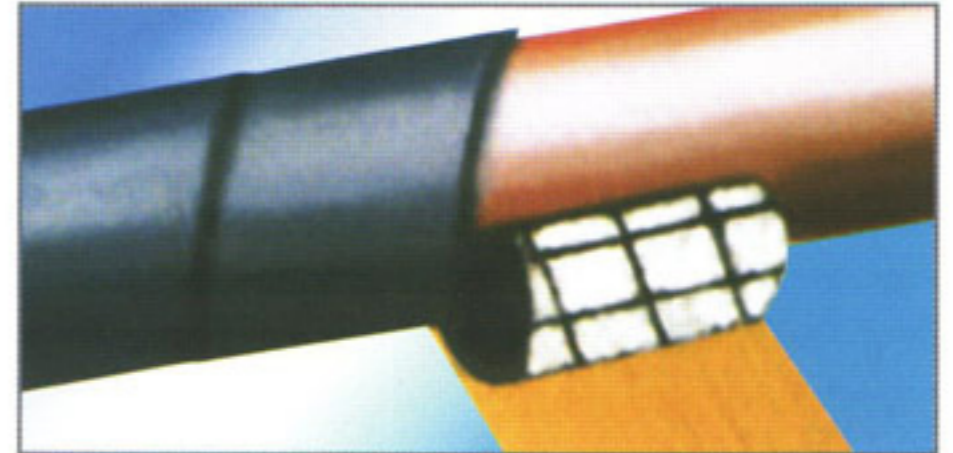

SPECIFICATION

- Size : 3mm X 50mm X 7.5 Mtr.
(other sizes available upon request)
- Packing : One roll of Gulf-O-Tape wrapped in a Plastic bag.

PHYSICAL PROPERTIES

- Composition : Closed Cell, elastomeric thermal insulation.
Same material as Gulf-O-Flex insulation Tubes and Sheets.
- Color : Black
- Density : 5± 1 pound per cubic feet. (0.06 ~0.10 g/cm³)
- Thermal : 0.26 BTU in/ft² hr oF at 75 oF (0.04 W/mk at 24 °C ASTM C-177)

CONDUCTIVITY

- Water Absorption : Max 5% by weight (ASTM D-1056)
- Water Vapour : 0.12 perm-inch (ASTM C-355)

PERMEABILITY

- Temperature Range : 0.12 °F (-29°C) to +200 °F (+93 °C)

THICKNESS TO PREVENT CONDENSATION.

Ambient Temperature and Relative Humidity	Pipe Temperature	
	50°F (10°C)	35 °F (2 °C)
80 °F (27°C) & 50% RH	Single Layer	50% Overlap
85°F (30°C) & 70% RH	50% Overlap Plus Single Layer	50% Overlap Plus 50 Overlap